


Permafused® Chain Link



Permafused® Color Chain Link... made to be durable

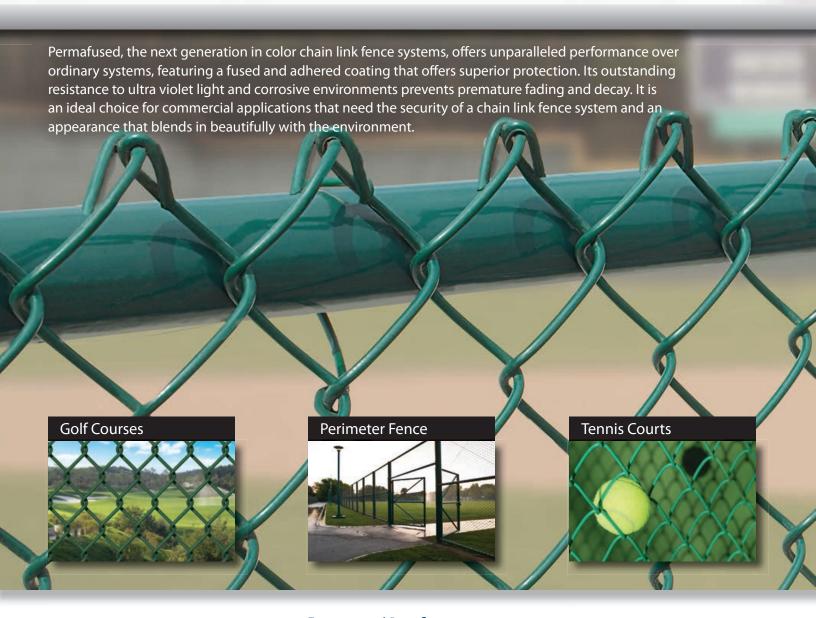

Our Permafused® Fencing System

Master Halco offers the highest quality products with unmatched reliability.




15 Year Warranty



Meets and Exceeds all ASTM Standards

Features and Benefits:

- Outstanding performance in highly corrosive environments provides years of protection.
- High impact resistance reduces the chance of damage during product handling and installation.
- Exceptional resistance to ultra violet light prevents premature fading.
- Extreme flexibility reduces susceptibility to cracking and chipping, even in changing weather conditions.
- 15 year limited warranty provides confidence and assurance that you've selected one of the best color chain link fence systems available.

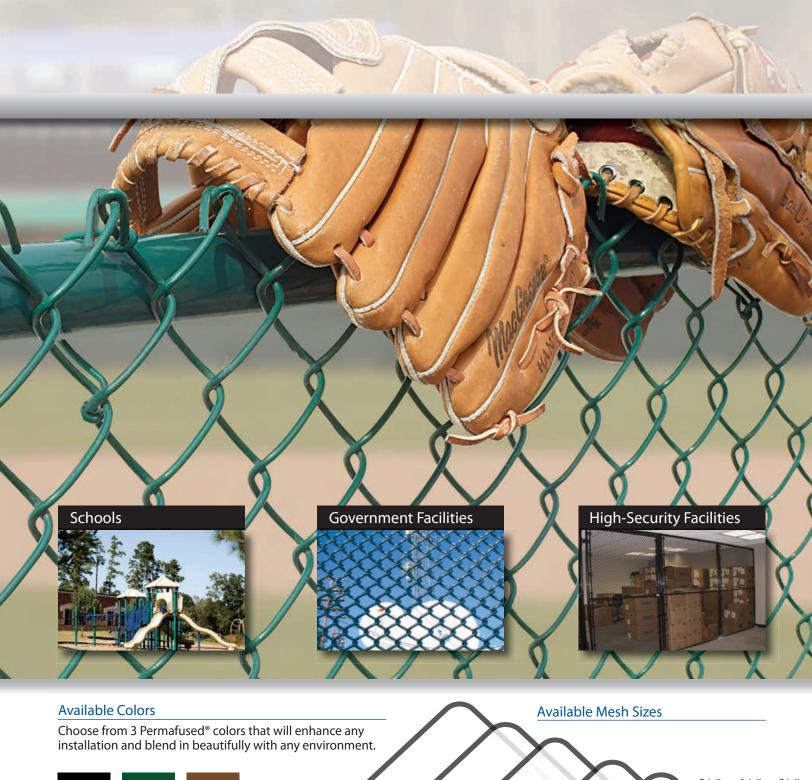



Permafused® Color Chain Link Recommendations

FABRIC

Permafused® Polymer Coating Fused and Adhered to Zinc-Coated Steel Wire per ASTM F 668 Class 2b.

Fabric Gauge	6 gauge, 9 gauge, 10 gauge, and 11 gauge core
Fabric Mesh	3/8", 1/2", 5/8", 1", 1-1/4", 1-1/2", 1-3/4", and 2"
Fabric Height	3', 42", 4', 5', 6', 7', 8', 9', 10', and 12'
Fabric Selvage	Knuckle - Knuckle (KK) for 5' and Under; for mesh sizes 1" and smaller. Knuckle - Knuckle (KK) or Knuckle - Twist (KT) for 6' and over.

FRAMEWORK - TYPE 1

Permafused® Polyester, 3 mils minimum, over galvanized steel ASTM F 1043, Group 1a, standard weight pipe, schedule 40. Hot-dipped galvanized with a minimum average 1.8 ounces per square foot of zinc-coated surface area. Note: Heavy Mil Schedule 40 available upon request.

1-5/8" O.D. Polyester Standard Weight Pipe (0.140" wall thickness, 2.27 lb./ft.)

Line Posts 2-3/8" 0.D. Polyester Standard Weight Pipe (0.154" wall thickness, 3.65 lb./ft.)

Terminal Posts 2-7/8" 0.D. Polyester Standard Weight Pipe (0.203" wall thickness, 5.79 lb./ft.)

FRAMEWORK - TYPE 2

Permafused® Polyolefin, 3 mils minimum, over galvanized steel ASTM F 1043, Group 1c, with a minimum yield strength of 50,000 PSI. Protective coating per ASTM F 1043, external coating type B, zinc with organic overcoat, 0.9 ounces per square foot minimum zinc coating with chromate conversion coating and verifiable polymer film. Note: Heavy Mil Schedule 40 available upon request.

1-5/8" O.D. Polyester Deluxe Quality (DQ) Pipe (0.111" wall thickness, 1.83 lb./ft.)

2-3/8" O.D. Polyester Deluxe Quality (DQ) Pipe (0.130" wall thickness, 3.12 lb./ft.)

2-7/8" O.D. Polyester Deluxe Quality (DQ) Pipe (0.160" wall thickness, 4.64 lb./ft.)

Gates

Fabric	Same Gauge and Mesh as Chain Link Selected
Frame	Same as Top Rail Selected

Fittings

Tension and Brace Bands	Polyester Coating, 3 Mils Minimum, Over Hot-Dipped Galvanized Pressed Steel		
Caps, Eye Tops, Rail Ends	Polyester Coating, 3 Mils Minimum, Over Hot-Dipped Galvanized Pressed Steel or Aluminum		
Sleeves	Polyester Coating, 3 Mils Minimum, Over Hot-Dipped Galvanized Steel		
Tie Wires	Polyester Coating, 3 Mils Minimum, Over Zinc-Coated Steel Wire		

Slats - Privacy

· · · · · · · · · · · · · · · · · · ·		
	Material Composition	Polyethylene Thermoplastic
	Colors	Green, Black, Brown, Gray, Redwood, Blue, Desert Sand



MasterHalco.com | 888-MH-Fence

Branch service centers are located throughout North America.



Avail	lable	from:		